


ARCTIC TRACE®

Inside Pipe Freeze Protection Pipeline or Storm Drain Application

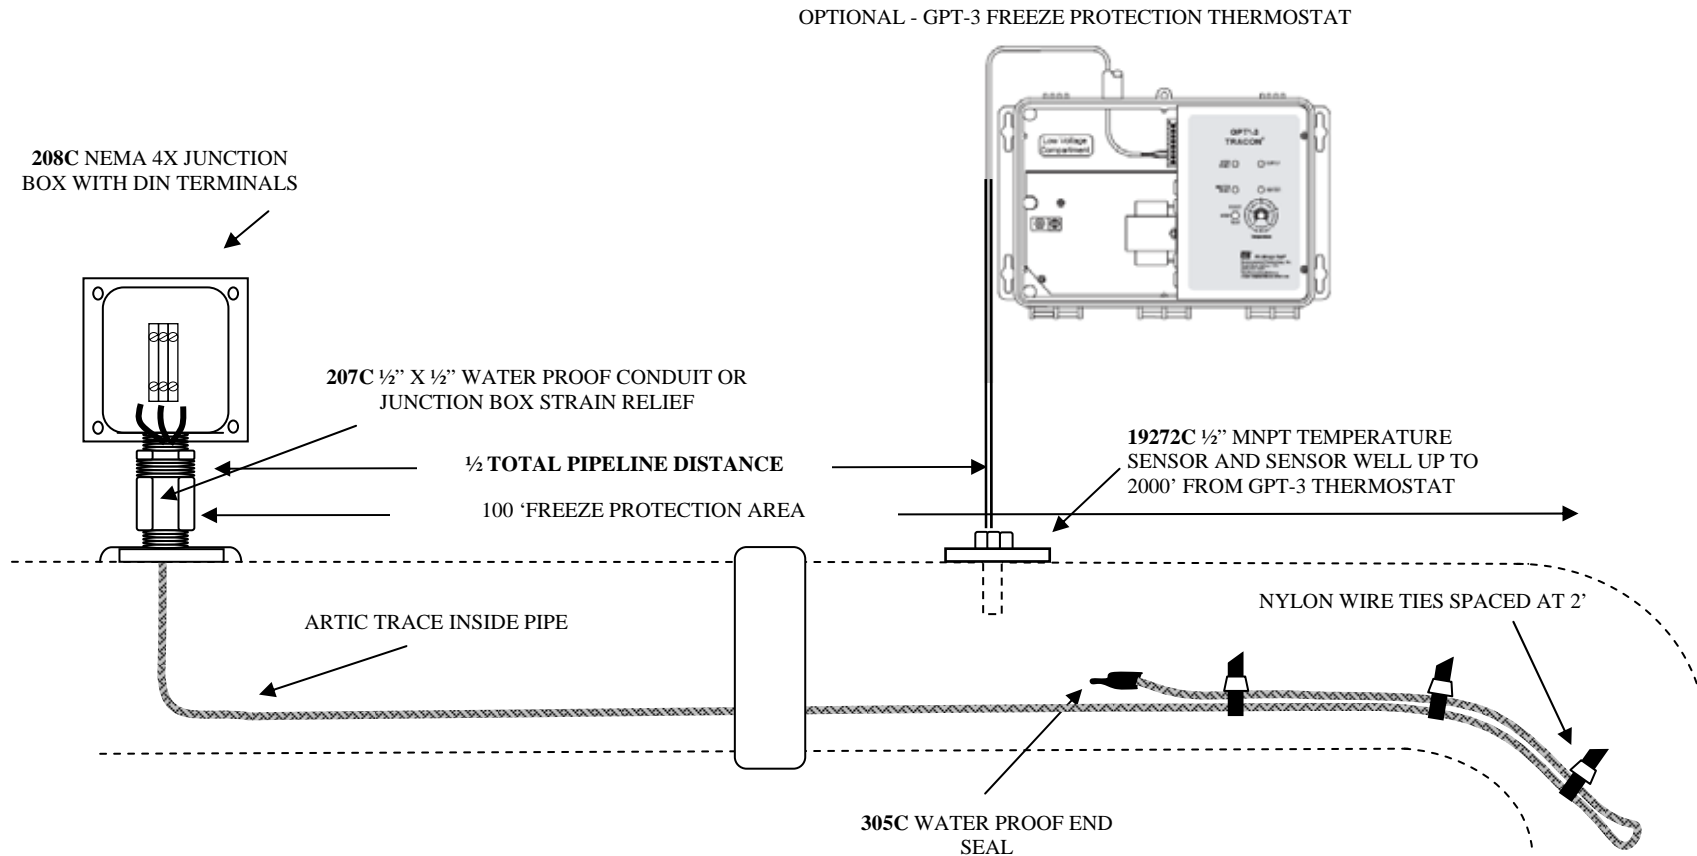

Submersible heat trace will enter the piping system using a 1/2" MNPT connection. Heat cable will run inside the piping system to protect any unconditioned area from freezing. An optional GPT-3 freeze protection thermostat may be installed to control temperature inside piping system and reduce operating cost. One temperature sensor for the GPT-3 controller should be installed in the pipeline or storm drain half way from the end of the protected area. Loop Arctic trace back 4' at pipeline outlet if it is exposed to weather

du Alaska Incorporated

6706 Greenwood Street, Anchorage, Alaska 99518
Phone (907) 522-3004 Fax (907) 349-1023